

L 30 W/77

FLUORA T8 | Tubular fluorescent lamps 26 mm, with G13 bases



- Wherever there is not enough natural daylight for plants
- Public buildings
- Offices
- Shops
- Supermarkets and department stores
- Restaurants

Product benefits

- Promotes photobiological processes in plants
- Promotes plant growth





Technical data

Electrical data Nominal wattage 30 W Rated lamp efficacy (HF data) Under clarification by authority and standardization body Rated wattage 30 W


Light technical data

Luminous flux at 25 °C	1000 lm
Light color	77
Color coordinates chromaticity diagram	0.338/0.243


Dimensions & weight

Tube diameter	26 mm
Length	895.0 mm
Length with base excl. base pins/connection	895.00 mm
Diameter	26.0 mm



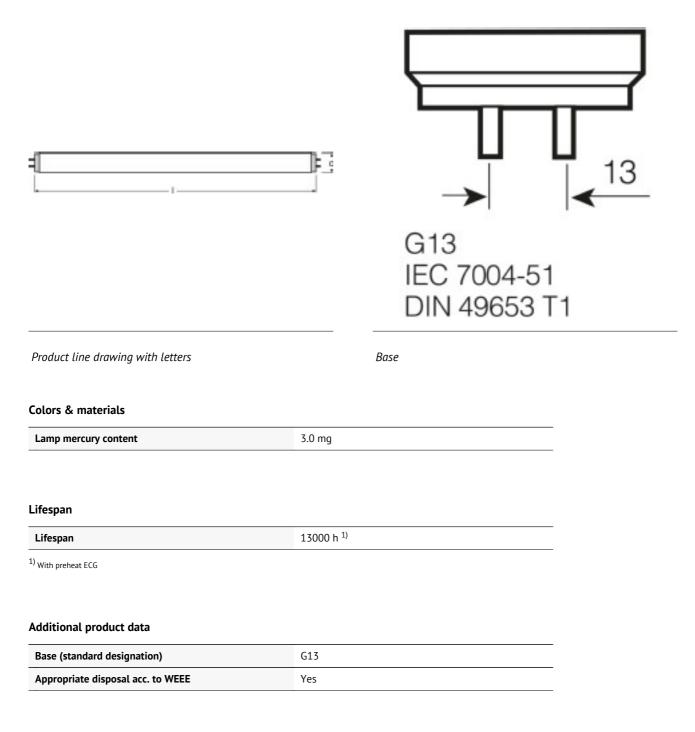



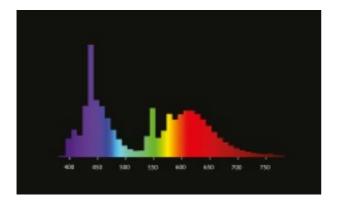

Spectral power distribution



Lamp-ECG combination (System)

HF 1x36/230-240 DIM

Products

HF 1x36/230-240 DIM

HF 2x36/230-240 DIM

Products

HF 2x36/230-240 DIM

QTP5 1x24-39

Products

QTP5 1x24-39

QTP5 2x24-39

Products

QTP5 2x24-39

QTi 1x36 DIM

Products

QTi 1x36 DIM

QTi 2x36 DIM

Products

QTi 2x36 DIM

QTi DALI 1x36 DIM



Products

QTi DALI 1x36 DIM


QTi DALI 2x36 DIM


Products

QTi DALI 2x36 DIM

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

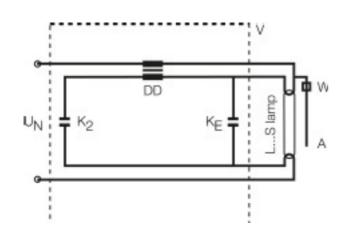

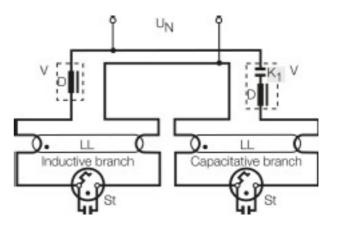

Circuit diagram

Circuit diagram



Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300003238	Sleeves 1	30 mm x 28 mm x 917 mm	141.00 g	0.77 dm³
4008321205216	Shipping carton box 10	151 mm x 67 mm x 941 mm	1664.50 g	9.52 dm³



References / Links

For more information on QUICKTRONIC electronic control gear go to

www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.