

## HALOLINE 1000 W 230 V R7S

---

HALOLINE Standard | Double ended halogen lamps with tube base



- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications

### Product benefits

---

- Brilliant accent light
- No transformer required
- Contains no mercury, can be thrown away with normal household waste

### Product features

---

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index  $R_a$ : 100
- Color temperature: 3,000 K
- Base: R7s
- Base: FA4

## Technical data

---

### Electrical data


Rated wattage	1000 W
Nominal wattage	1000 W
Nominal voltage	230 V
Claimed equiv. conventional lamp power	1000 W
Rated power factor $\lambda$	1.00

### Light technical data

Light color as per EN 12464-1	Warm White
Nominal luminous flux	22000 lm
Rated luminous flux	22000 lm
Color temperature	2900 K
Color rendering index Ra	100
Starting time	0.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.85

### Dimensions & weight

Length	191.1 mm
Overall length	185.7 mm
Diameter	12.0 mm
Outer bulb	T12

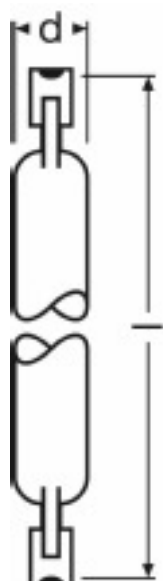

Product line drawing with letters

#### Colors & materials

Lamp mercury content	0.0 mg
Mercury-free	Yes

#### Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	1000000 <sup>1)</sup>

<sup>1)</sup> At 1 s on / 1 s off

#### Additional product data

Base (standard designation)	R7s
Footnote used only for product	Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

**Capabilities**

<b>Dimmable</b>	Yes
<b>Burning position</b>	p15
<b>Fuse, quick-acting</b>	6.3 A
<b>Non-standard conditions</b>	P 15

**Certificates & standards**

<b>EEI – Energy Label</b>	F
---------------------------	---

**Country specific categorizations**

<b>ILCOS</b>	HDG-1000-230-R7s-191,1
<b>Order reference</b>	64740

## Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300004174	Folding carton box 1	30 mm x 26 mm x 238 mm	24.10 g	0.19 dm <sup>3</sup>
4050300206875	Shipping carton box 12	112 mm x 85 mm x 245 mm	352.20 g	2.33 dm <sup>3</sup>

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.