

HCI-TS 150 W/830 WDL RX7S-24

POWERBALL HCI-TS | Metal halide lamps with ceramic technology for enclosed luminaires



- Shopping arcades
- Foyers, reception areas
- Museums, exhibitions
- Exhibition halls and trade fairs
- Factories and workshops
- Buildings, monuments, bridges

Product benefits

- Very high efficiency
- Good to excellent color rendering
- Very good color stability
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

Product features

- POWERBALL ceramic technology
- UV filter technology
- Light colors: warm white (830 WDL), neutral white (942 NDL)
- Average life: 15,000 hours (on electronic control gear)
- Average life: 12,000 hours (on magnetic control gear)



Technical data

Electrical data

Nominal wattage	150 W
Lamp current	1.8 A
Rated wattage	148 W
PFC capacitor at 50 Hz	20 μ F ¹⁾

¹⁾ At rated voltage and $\cos \varphi \geq 0.9$


Light technical data

Luminous flux	15000 lm ¹⁾
Color rendering index Ra	90
Color rendering group	1B
Color temperature	3000 K
Color temperature	3000 K
Luminous efficacy	102 lm/W ¹⁾
Light color	830

¹⁾ In operation on low frequency square wave electronic ballast, 70-400 Hz. Operation on electromagnetic ballast may be less efficient.

Dimensions & weight

Diameter	23.0 mm
Length	138.0 mm
Light center length (LCL)	69.0 mm

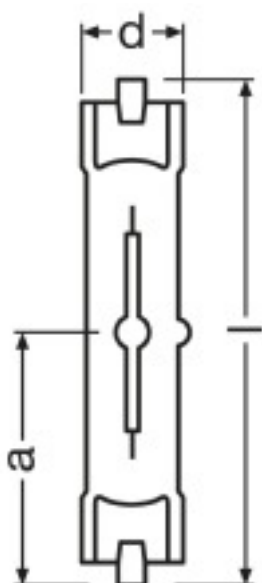

Product line drawing with letters



Base

Colors & materials

Lamp mercury content	22.0 mg
Mercury-free	No

Temperatures

Maximum permitted pinch temperature	300 °C
-------------------------------------	--------

Lifespan

Lifespan B50	15000 / 12000 h ¹⁾
--------------	-------------------------------

¹⁾ At ECG / At CCG

Additional product data

Base (standard designation)	RX7s
Design / version	Clear

Additional product data

Footnote used only for product	Only for standard igniters with ignition voltage of 3.6 to 5kV
---------------------------------------	--

Capabilities

Burning position	p45
-------------------------	-----

Lamp-ECG combination (System)

PTi 150/220-240 I

Products

PTi 150 I


PTi 150/220-240 S

Products

PTi 150 S


System guarantee

For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.

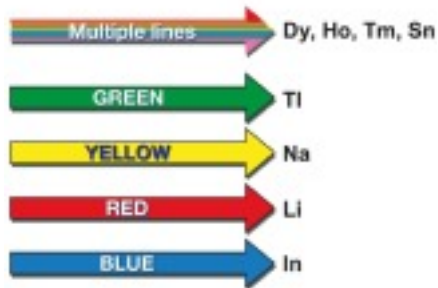


Variation possibilities of the Colour Temperature

		T_n	CRI
Daylight	D	> 5300 K	≥90
Neutral White	N	ca. 4000 K	60-69
Neutral White de luxe	NDL	4200 K	≥80
Warm White de luxe	WDL	3000 K	≥80

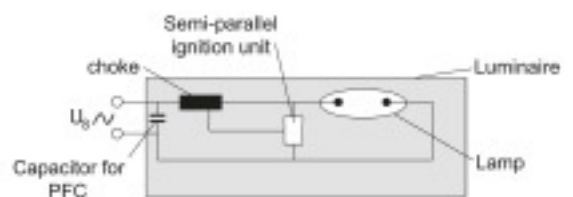


Others graphics

Circuit diagram

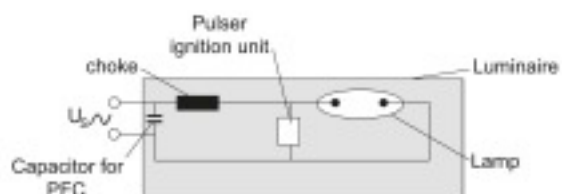

Circuit diagram

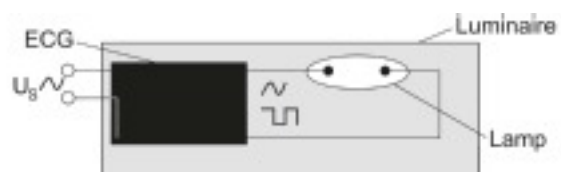

Circuit diagram

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321679857	Folding carton box 1	42 mm x 42 mm x 159 mm	43.00 g	0.28 dm ³
4008321679864	Shipping carton box 12	139 mm x 179 mm x 180 mm	603.00 g	4.48 dm ³

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.