

HALOLINE 1500 W 230 V R7S

HALOLINE Standard | Double ended halogen lamps with tube base



- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications

Product benefits

- Brilliant accent light
- No transformer required
- Contains no mercury, can be thrown away with normal household waste

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 3,000 K
- Base: R7s
- Base: FA4

Technical data

Electrical data


Rated wattage	1500 W
Nominal wattage	1500 W
Nominal voltage	230 V
Claimed equiv. conventional lamp power	1500 W
Rated power factor λ	1.00

Light technical data

Light color as per EN 12464-1	Warm White
Nominal luminous flux	33000 lm
Rated luminous flux	33000 lm
Color temperature	2900 K
Color rendering index Ra	100
Starting time	0.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.80

Dimensions & weight

Length	256.1 mm
Overall length	250.7 mm
Diameter	12.0 mm
Outer bulb	T12

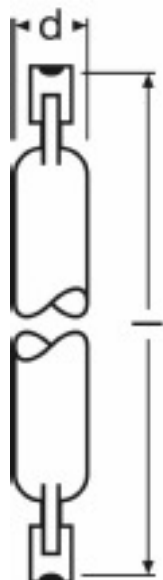

Product line drawing with letters

Colors & materials

Lamp mercury content	0.0 mg
Mercury-free	Yes

Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	1000000 ¹⁾

¹⁾ At 1 s on / 1 s off

Additional product data

Base (standard designation)	R7s
Footnote used only for product	Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

Capabilities

Dimmable	Yes
Burning position	p15
Fuse, quick-acting	10.0 A
Non-standard conditions	P 15

Certificates & standards

EEI – Energy Label	F
--------------------	---

Country specific categorizations

ILCOS	HDG-1500-230-R7s-256,1
Order reference	64760

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300004181	Folding carton box 1	26 mm x 26 mm x 303 mm	31.97 g	0.20 dm ³
4050300209128	Shipping carton box 12	117 mm x 84 mm x 315 mm	453.52 g	3.10 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.